



30° ESCALATOR CONSTRUCTION PARAMETER

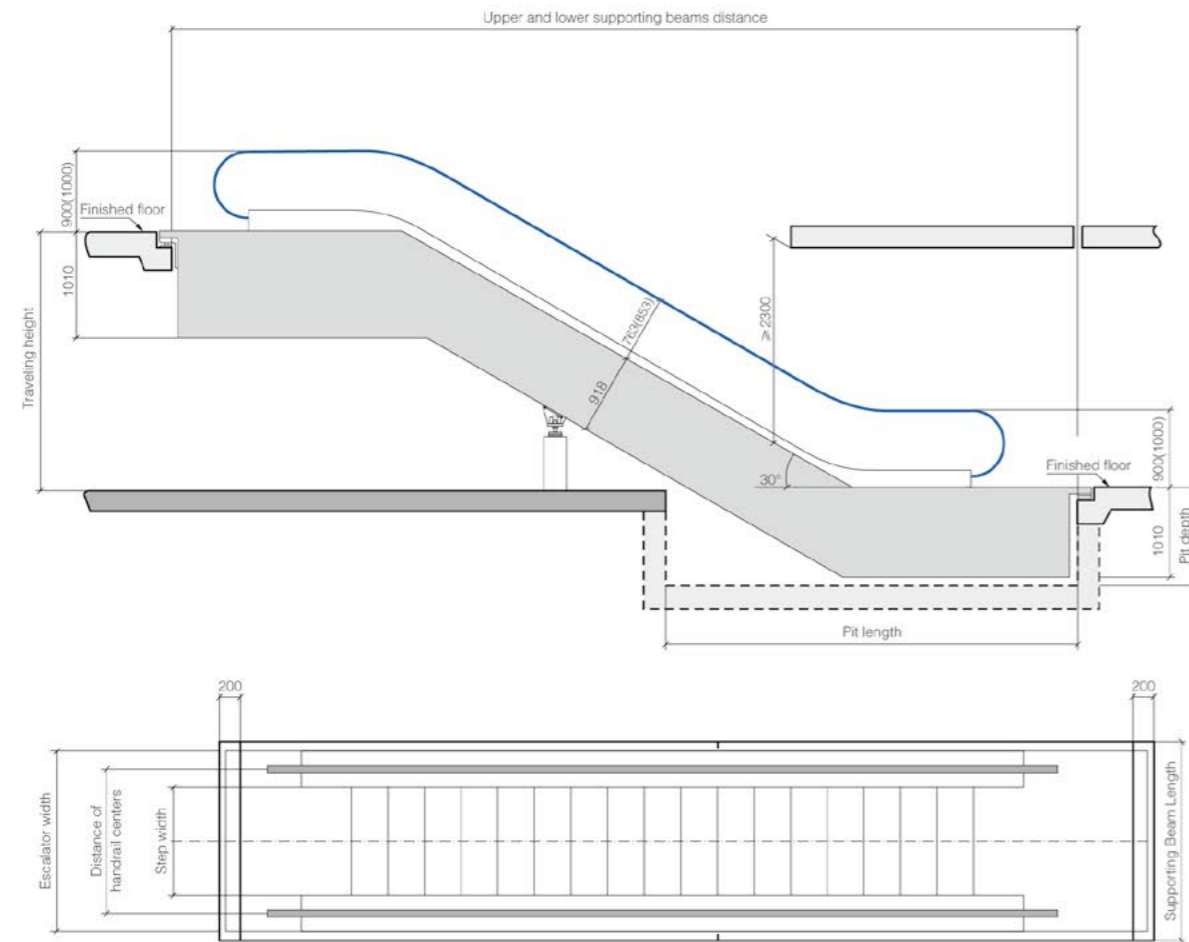

35° ESCALATOR CONSTRUCTION PARAMETER

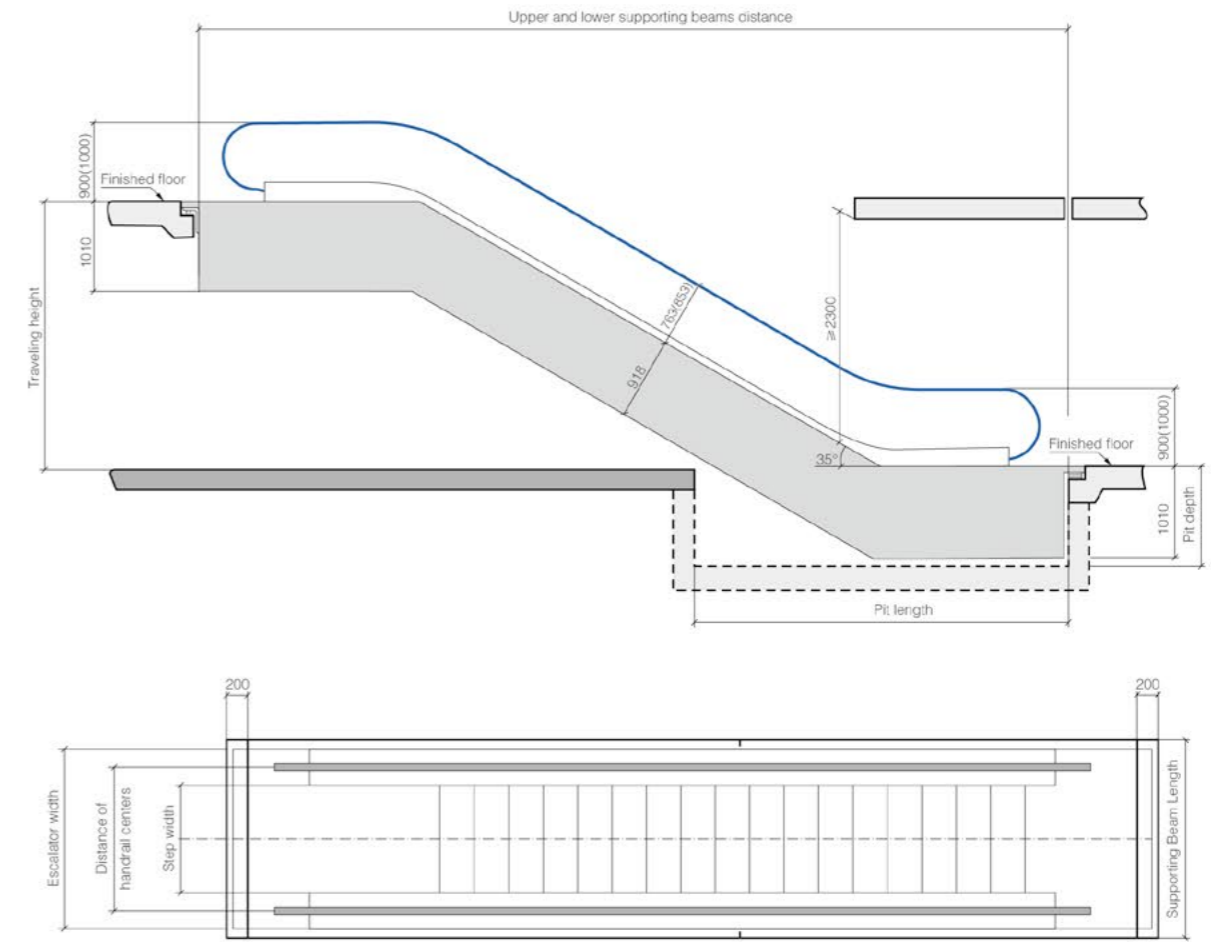

Model	Rise (mm)	Rated speed (m/s)	Capacity (per./h)	Inclination (°)	No. of horizontal steps	Motor power (Kw)	A (mm)	B (mm)	C (mm)	D (mm)
TF (600/30°)	3000 ≤ H ≤ 6000	0.5	4500	30	2(3)	8	600	838	1200	≥ 1260
	6000 < H ≤ 7200				3	11				
TF (800/30°)	3000 ≤ H ≤ 4800	0.5	6750	30	2(3)	8	800	1038	1400	≥ 1460
	4800 < H ≤ 6000				2(3)	11				
	6000 < H ≤ 6400				3	11				
	6400 < H ≤ 7200				3	15				
TF (1000/30°)	3000 ≤ H ≤ 4800	0.5	9000	30	2(3)	8	1000	1238	1600	≥ 1660
	4800 < H ≤ 6000				2(3)	11				
	6000 < H ≤ 6400				3	11				
	6400 < H ≤ 7200				3	15				

Model	Rise (mm)	Rated speed (m/s)	Capacity (per./h)	Inclination (°)	No. of horizontal steps	Motor power (Kw)	A (mm)	B (mm)	C (mm)	D (mm)
TF (600/35°)	3000 ≤ H ≤ 6000	0.5	4500	35	2	8	600	838	1200	≥ 1260
TF (800/35°)	3000 ≤ H ≤ 5200	0.5	6750	35	2	8	800	1038	1400	≥ 1460
	5200 < H ≤ 6000					11				
TF (1000/35°)	3000 ≤ H ≤ 5200	0.5	9000	35	2	8	1000	1238	1600	≥ 1660
	5200 < H ≤ 6000					11				